Dual-output Thermocouple Converter



This compact plug-in converter accepts Thermocouples input conforming to JIS standard and provides optically isolated two DC outputs.

This converter has a linearizer, a cold junction compensation circuit, and a burnout protection circuit as standard equipment which is required to measure temperature.

Features

- ★ Fine Zero & span adjustment by 15 turn trimmer
- ★ Zero & span adjustment ±10% full scale
- \star Safe design by dielectric strength of 3000Vac
- \star 5 years warranty, long life
- ★ CE approved
- ★ Linearizer, Cold junction compensation circuit, and Burnout protection circuit built-in

Ordering code

WSP- <mark> T H W</mark> -								
.								
Code	Input Signal							
Т	T (CC) thermocouple							
Е	E (CRC) thermocouple							
J	J (IC) thermocouple							
K	K (CA) thermocouple							
Ν	N thermocouple							
R	R (PR13) thermocouple							
S	S thermocouple							
В	B thermocouple							
W	WRe 5-26							

								D	* 2	24V	/do
								8		110	Vo
Measuring				Μ	anu	fact	urat	ble			
Temperature	Code		-	<u> </u>	<u> </u>	-	rmo		_		
Range		Т	Ε	J	K	Ν	R	S	В	W	
0 to 100°C	08	0	\bigcirc	\bigcirc	\bigcirc						
0 to 150°C	09	0	\bigcirc	\bigcirc	\bigcirc	\bigcirc					
0 to 200°C	10	0	\bigcirc	\bigcirc	\bigcirc	\bigcirc					
0 to 250°C	11	\bigcirc	\bigcirc	\bigcirc	\bigcirc	\bigcirc					
0 to 300°C	12	\bigcirc	\bigcirc	\bigcirc	\bigcirc	\bigcirc					
0 to 400°C	13		\bigcirc	\bigcirc	\bigcirc	\bigcirc	\bigcirc	\bigcirc			
0 to 500°C	14		\bigcirc	\bigcirc	\bigcirc	\bigcirc	\bigcirc	\bigcirc			
0 to 600°C	15		\bigcirc	\bigcirc	\bigcirc	\bigcirc	\bigcirc	\bigcirc		\bigcirc	
0 to 800°C	16				\bigcirc	\bigcirc	\bigcirc	\bigcirc	\bigcirc	\bigcirc	
0 to 1000°C	17				\bigcirc	\bigcirc	\bigcirc	\bigcirc	\bigcirc	\bigcirc	
0 to 1200°C	18				\bigcirc	\bigcirc	\bigcirc	\bigcirc	\bigcirc	\bigcirc	
0 to 1300°C	19						\bigcirc	\bigcirc	\bigcirc	\bigcirc	
0 to 1400°C	20						\bigcirc	\bigcirc	\bigcirc	\bigcirc	
0 to 1600°C	21						\bigcirc	\bigcirc	\bigcirc	\bigcirc	
0 to 1800°C	22								\bigcirc	\bigcirc	
0 to 2000°C	23									\bigcirc	
0 to 2300°C	24									\bigcirc	
Other than above 99 * 1					Cor	ntac	t us				

*1···CE approval do not adapt input range code 99 and output range code S. *2···CE approval do not adapt when power supply is 10.8Vdc to 30Vdc.

Specifications


1												
Code Po					Power Supply			Test Report				
A 100 to 240Vac ±						0% 50/60Hz	Х	None				
D * 2 24Vdc ±10% 1						8 to 30Vdc	Т	With Test report				
	8		11()Vdc ±1	0%							
					Code	Output 2	Allowab	le Load Resistance				
ab	le				Α	4 to 20mAdc	350Ω or less					
no	cou	ple			G	0 to 20mAdc	350Ω or le	SS				
R	S	В	W		Н	1 to 5Vdc	1kΩ or mo	re				
					Ν	0 to 5Vdc	1kΩ or mo	re				
					Р	0 to 10Vdc	2kΩ or mo					
					S	Contact us for	other than	the above				
						Current outpu	out 20mA or less					
					*1	Voltage outpu	out 10V or less					
C	\bigcirc				+							
\sum	\bigcirc				Code	Output 1	Allowab	le Load Resistance				
\sum	\bigcirc		\bigcirc		Α	4 to 20mAdc	20mAdc 750Ω or less					
\sum	\bigcirc	\bigcirc	\bigcirc		В	1 to 5mAdc	3kΩ or less					
\sum	\bigcirc	D 0 to 1mAdc					15kΩ or less					
\sum	\bigcirc	\bigcirc	\bigcirc		Е	0 to 10mAdc	1.5kΩ or less					
$\left(\right)$	\bigcirc	\bigcirc	\bigcirc		G	0 to 20mAdc	750Ω or less					
-	\bigcirc	\bigcirc	\bigcirc		Н	1 to 5Vdc	1kΩ or more					
\sum	\bigcirc	\bigcirc	○ ○ J 0 to 10mVdc				10kΩ or more					
		\bigcirc	\bigcirc		K	0 to 100mVdc	$100k\Omega$ or r	more				
			\bigcirc		L	0 to 1Vdc	200Ω or more					
○ N 0 to 5Vdc				Ν	0 to 5Vdc	1kΩ or more						
P 0 to						0 to 10Vdc	$2k\Omega$ or mo	re				
LS Contact us fo						Contact us for	r other than the above					
S Current outr						Current outpu	ut 20mA or less					
*1 Voltage of						Voltage outpu	<u>ut 10V or le</u>	SS				

Terminal connections

±0.2% FS (at 23±10°C)						
Approx. 25ms (0 to 90%)						
Current output						
First output : 15V or less of voltage drop between output						
Second output : 11V or less of voltage drop between output						
Voltage output						
Load current 5mA or less *1µA or less if the output is less than 1V						
±10% FS (15 turn trimmer)						
-5 to +55°C						
90% or less (Non-condensing)						
±0.015% FS of span per °C						
±0.5°C or less at 23±10°C (±1°C or less for R, WR and S)						
10 to 40°C *R, S, WR thermocouple : ±1°C						
Available (30% FS or less of R and W is out of range)						
Upscale / downscale *Please specify when you order for						
Between input, output, and power supply						
100MΩ or more with 500Vdc megger						
Between input, output, and power supply terminal						
3000Vac for 1 min between power supply and input/output terminal,						
2000Vac for 1 min between input and output terminal						
Approx. 5.6VA (AC), Approx. 90mA (DC)						
±0.1% FS (within the range of rated voltage)						
84(H) X 29.5(W) X 106.5(D)mm						
Approx. 150g						
Plug-in (Body part and socket part)						
M3 SEMS screw part of the base socket (Tightening torque 0.6N·m)						
DIN rail or wall surface						
Ivory, ABS resin, flame retardant grade UL94V-0						
EN61326-1, EN61010-1, EN IEC 63000						
Installation category : II, Pollution degree : 2						

\bigcirc	No	Symbol		Description
	1	INPUT	+	Input
	2	OUTPUT-2	+	No.2 Output
1320	3	INPUT	-	Input
6 54	4	CJC		Cold junction
al rafe	4	000		compensation
	5	OUTPUT-2	-	No.2 Output
	6	NC		No connection
	7	OUTPUT-1	+	No.1 Output
	8	NC		No connection
9 87	9	OUTPUT-1	-	No.1 Output
	10 11	POWER	U(+) V(-)	Power Supply

Demensions

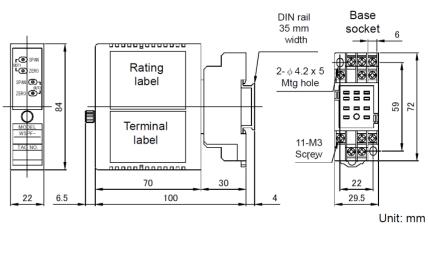

* Specification is subject to change without notice

Watanabe Electric Industry Co. Ltd.