


NEW!

MIPI CSI VIDEO OUTPUT BOARD

SVO-06 CSI

This board can send free video signals to devices and ICs that have MIPI CSI input. It is possible to adjust the format and output timing of the video signal using a PC.

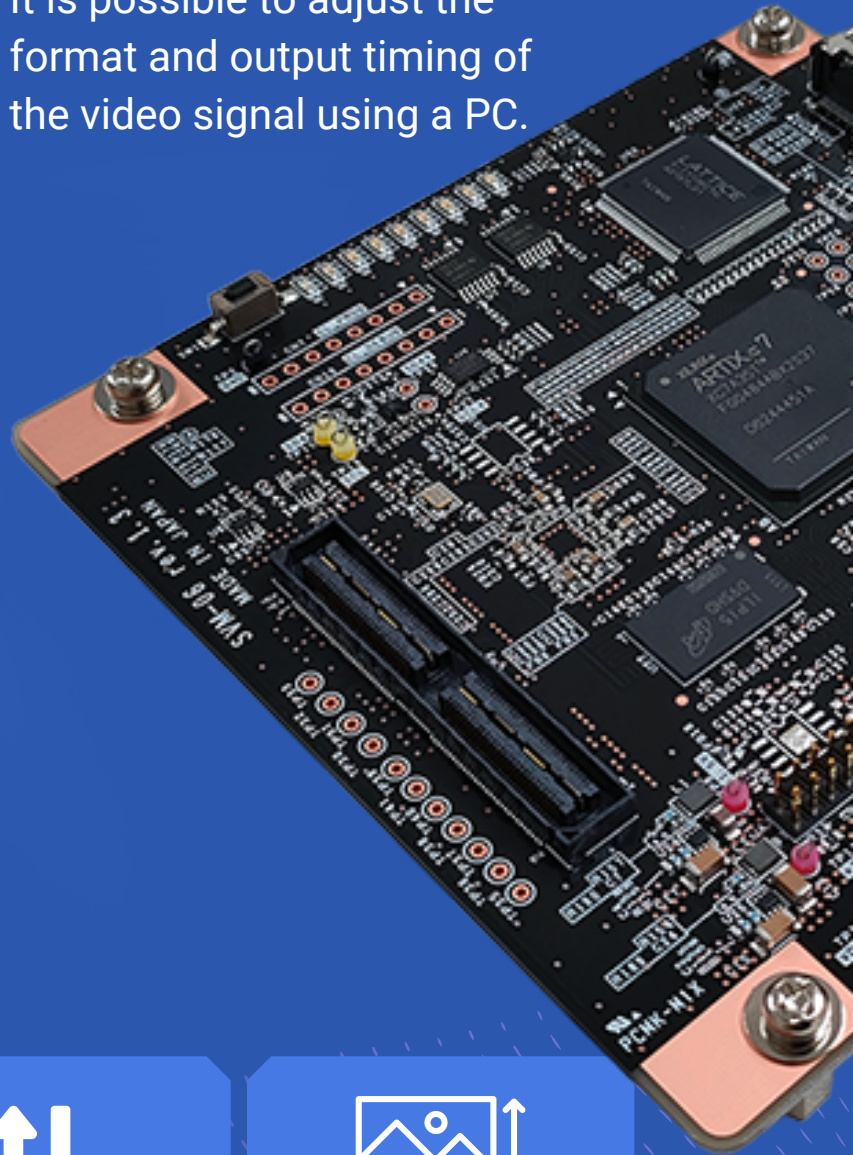

input via
USB 3.0 to
the MIPI CSI



USB bus supply
(external power input applicable)
+5V 0.7A typ.



USB 3.0
to
MIPI CSI video signal
(4 data lanes + 1 clock lane)



Input/Output Resolution:
Max
Width = 8190 px
Height = 4095 px

Contact us: 847-584-2610 | sales@n-denkeiamericas.com



Inquiry

Denkei site