

CONPROSYS Robust I/O Series
Modbus-TCP Ethernet Remote I/O
Photo MOS Relay Output 8ch
CPSR-ET7066



* Specifications, color and design of the products are subject to change without notice.

Features

Built-in Web Server
 Web HMI
 Support for both Modbus TCP and Modbus UDP Protocols
 Communication Access Control
 Dual Watchdog
 I/O Pair Connection
 Built-in I/O
 PhotoMOS Relay: 8 Channels

Support Software

Name	Contents	How to get
DAQ-LIBMB-WIN	Modbus communication library for Windows	Download from the CONTEC website
DAQ-LIBMB-LNX	Modbus communication library for Linux	Download from the CONTEC website
CONPROSYS Robust I/O Utility	Users can configure the communication parameters and I/O settings for each module by using CONPROSYS Robust I/O Utility.	Download from the CONTEC website
Modbus Master Tool	It provides a friendly interface for quick configuring and communicating our Modbus slave devices.	Download from the CONTEC website

Download the files from the following URL
<https://www.contec.com/download/>

The product provides 8 form A PhotoMOS relays. It features optical isolation for 3000 Vrms of transient overvoltage protection and doesn't have channel-to-channel isolation. The power-on value and safe value of PhotoMOS relay are programmable. It can safely be used in applications where hazardous voltages are present.

- * The contents in this document are subject to change without notice.
- * Visit the CONTEC website to check the latest details in the document.
- * The information in the data sheets is as of July, 2026.

Specifications


System specification

Model	Description
Software	
Built-in Web Server	Yes
CPU Module	
Watchdog Timer	Module, Communication (Programmable)
2-Way Isolation	
Ethernet	1500 VDC
I/O	3000 VDC
EMS Protection	
EFT (IEC 61000-4-4)	±2 kV for Power Line
ESD (IEC 61000-4-2)	±4 kV Contact for Each Terminal
LED Indicators	
Status	Run, Ethernet
Ethernet	
Ports	1 x RJ-45, 10/100 Base-TX
Access Control	ID, Password and IP Filter
Protocol	Modbus TCP, Modbus UDP
Power	
Reverse Polarity Protection	Yes
Consumption	2.6 W (Max.)
Powered from Terminal Block	+10 to +30 VDC
Mechanical	
Dimensions (mm)	72(W) x 123(L) x 35 (H)
Installation	DIN-Rail Mounting
Environment	
Operating Temperature	-25 - +75 °C
Storage Temperature	-30 - +80 °C
Humidity	10 - 95% RH, Non-condensing
Standard	VCCI Class A, FCC Class A, CE Marking (EMC Directive Class A, RoHS Directive), UKCA

I/O specification

Item	Description
PhotoMOS Relay	
Channels	8
Type	PhotoMOS Relay, Form A
Contact Rating	60V/1.0A (Operating Temperature -25 to +40°C) 60V/0.8A (Operating Temperature +40 to +60°C) 60V/0.7A (Operating Temperature +60 to +75°C)
Leakage Current	1 μA
Operate Time	2.0 ms (Max)
Release Time	0.3 ms (Max)
Power on Value	Programmable
Safe Value	Programmable

Pin Assignments

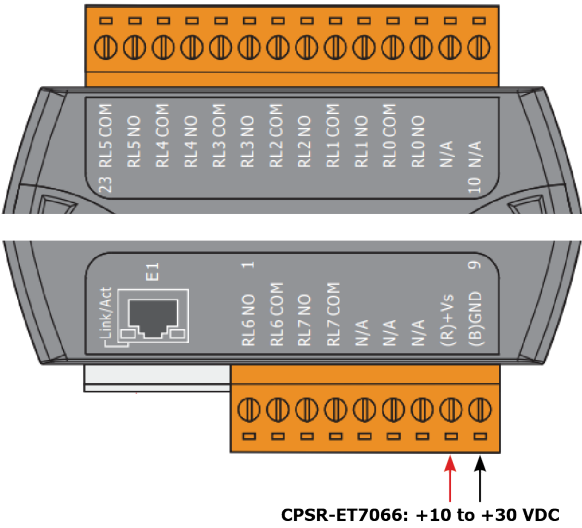

Wire Connections

PhotoMOS Relay	ON State Readback as 1
Form A Relay Contact	
	OFF State Readback as 0