

# DC Voltage / Current Measurement

# WPMZ-1

- DC Voltage / Current input
- High-speed sampling rate (1ch : 4000 times/sec, 2ch : 2000 times/sec)
- Alarm log function

[WPMZ-1] is for measuring DC voltage / Current, and it is especially suited for High-speed sampling on the production line in factory manufacturing process. We recommend using at parts inspection for shortening the inspection process by NG judgement and clearance judgement etc.



## Application examples



## Main Specifications

<b>Power supply</b>	<b>Input : Ach/Bch</b>	<b>Option output</b>	<b>Comparator output (AL1~AL4)</b>
<ul style="list-style-type: none"><li>• 100~240VAC ±10%</li><li>• 12VDC ±10%</li><li>• 24~48VDC ±10%</li></ul>	<ul style="list-style-type: none"><li>• DC Voltage / Current input (Process input)</li></ul>	<ul style="list-style-type: none"><li>• Analog output</li><li>• BCD output (Open collector NPN / PNP)</li><li>• RS-232C</li><li>• RS-485 (Modbus RTU)</li></ul>	<ul style="list-style-type: none"><li>• Open collector output (NPN / PNP)</li><li>• Relay output (Normally open)</li></ul>




## Features

- Easy to read by 2.4 inch TFT Full color LCD display
- High-speed sampling rate (1ch : Max. 4000 times/sec, 2ch : Max. 2000 times/sec)
- Alarm log function up to 8 alarm trend data
- [Value], [Bar graph] and [Trend graph] Display can be selected according to the measurement
- Standard 1ch input type, and also 2ch input type which can use for special measurement

## Model

**WPMZ-1 — ① ② ③ — ④ ⑤ — ⑥ ⑦**



Series	① Power supply	② Input Ach	③ Input Bch	④ Option output	⑤ Comparator output	⑥ Test report	⑦ Suffix code	Description
<b>WPMZ-1</b>								DC Voltage / Current measurement
	1							Power supply : 100 to 240VAC ±10%
	3							Power supply : 12VDC ±10%
	4							Power supply : 24 to 48VDC ±10%
		1						±99.99mVDC
		2						±99.99mVDC
		3						±9.999mVDC
		5						±99.99μADC
		6						±99.99μADC
		7						±9.999mADC
		B						Process input (DC Voltage / Current)
			X					None
			1					±99.99mVDC
			2					±99.99mVDC
			3					±9.999mVDC
			5					±99.99μADC
			6					±99.99μADC
			7					±9.999mADC
			B					Process input (DC Voltage / Current)
			X					Display only (External control)
			1					Analog output
			2					BCD output (Open collector NPN)
			3					BCD output (Open collector PNP)
			4					RS-232C output
			5					RS-485 output (Modbus RTU)
			E					Open collector output (NPN) (AL1~AL4)
			F					Open collector output (PNP) (AL1~AL4)
			R					Relay output (Normally open) (AL1~AL4)
			X					Without Test report
			T					With Test report
			00					Japanese default setting
			EO					English default setting

## Input Specifications

Ach input (1ch) / Bch input (2ch)

■ DC Voltage input Input code **1 2 3**

Code	Measurement range	Input resistance	Max. allowable input	Accuracy
1	± 99.99mV	Approx. 1MΩ	± 10V	± (0.05% of FS + 1digit)
2	± 999.99mV		± 100V	
3	± 9.9999V		± 100V	

■ DC Current input Input code **5 6 7**

Code	Measurement range	Input resistance	Max. allowable input	Accuracy
5	± 99.999μA	Approx. 1kΩ	± 1mA	± (0.1% of FS + 1digit)
6	± 999.99μA		± 10mA	
7	± 9.9999mA		± 50mA	

■ Process input(DC Voltage/Current) Input code **B**

Code	Measurement range	Input resistance	Max. allowable input	Accuracy	
B	± 5V	Approx. 1MΩ	± 100V	± (0.05% of FS + 1digit)	
	0~5V				
	1~5V				
	± 10V				
	0~10V	Approx. 10Ω	± 50mA		
	± 20mA				
	0~20mA				
	4~20mA				

A/D conversion

ΔΣ conversion

Input Configuration

Single ended

Sampling rate

1ch input model : Max. 4000 times/sec

2ch input model : Max. 2000 times/sec

## Common Specifications

Measurement channel  
Display

1ch or 2channels

24 inch TFT LCD

1ch input : Measurement results of Ach input

2ch input : Either measurement results of Ach input, measurement results of Bch input, or calculation results

Measurement results of Ach and Bch input

Measurement results and calculation results of Ach or Bch input  
—99999 to 99999

Leading zero suppression

Arbitrary setting possible

OVER or - OVER when input range or display range is exceeded  
-5 to 50 °C, 35 to 85% RH (No condensation)

-10 to 70 °C, 60% RH or less

100 to 240VAC ±10% 50/60 Hz

12VDC ±10%

24 to 48 VDC ±10%

10VA (100VAC), 14VA (240VAC), 6W (12VDC), 6W (24VDC), 6.5W (48VDC)

12VDC ±10% 100mA max. / 24VDC ±10% 50mA max.

\*When 2channel input, allowable current of Ach and Bch together will be above current.

\*1.2W max. when the combination of 12VDC and 24VDC

96mm(W) x 48mm(H) x 145mm(D), 1/8 DIN size

Approx. 350g

AC power supply :

3000VAC for 1 minute: Between the power supply terminal - input / external control / comparator output / option output

DC power supply :

1500VAC for 1 minute: Between the power supply terminal - input / external control / comparator output / option output

AC/DC power supply :

1500VAC for 1 minute: Between the input terminal - external control / comparator output / option output

Between Case - each terminals : 3000VAC for 1 minute

Between Input ch : 1500VAC for 1 minute

100MΩ (500VDC) or more between the above terminals

IP66 (Front bezel)

2000m or less

2

EN61326-1 (EMS : Industrial installations; EMI : Class A)

\*Applies to wire length of 30m or less

EN61010-1

EN IEC 63000

Polycarbonate, Black UL94V-0

**External control**

\*Execute by COM terminal short circuit

<b>Compare reset</b>	Turns OFF comparator output monitor and comparator output
<b>Display hold</b>	Holds the display value
<b>Peak hold</b>	Holds the max. value
<b>Bottom hold</b>	Holds the min. value
<b>Amplitude Hold</b>	Holds the difference between max. and min. value
<b>Deviation hold</b>	Holds the display value that has the max. absolute value of difference from reference value
<b>Average hold</b>	Stabilize display by additional moving average for the set number of times
<b>Hold reset</b>	Reset hold state of display value
<b>Digital zero</b>	Set the display value to zero value
<b>Display change</b>	Changes the measurement display
<b>Trend log</b>	Acquire alarm log
<b>Pattern select</b>	Changes the setting patterns (Max. 8 pattern)

\*Each function can be assigned to control terminal 1 to 5.

**Option Specifications****Comparator output**

<b>Output method</b>	Open collector output or Relay output
● <b>Open collector output</b>	Rated output NPN : Sink current Max. 50mA PNP : Source current Max. 50mA Applied voltage Max. 30V Output saturation voltage 1.2V or less at 50mA Contact rating : 250VAC 2A, 30VDC 2A Mechanical life : 20,000,000 times Electrical life : 100,000 times
● <b>Relay output</b>	Microcomputer operation method Setting range -99999 to 99999 Hysteresis 1 to 99999 digit for each setpoints Comparison condition Condition can be set to AL1 to AL4 independently The alarm is ON when display value exceeds setpoint (Over alarm) The alarm is ON when display value is under setpoint (Under alarm)
<b>Control method</b>	Modbus RTU*
<b>Setting range</b>	Original command, Original output

**Over alarm (Upper limit judgement)**

Comparison condition	Result
Display value > AL1 judgement value	AL1
Display value > AL2 judgement value	AL2
Display value > AL3 judgement value	AL3
Display value > AL4 judgement value	AL4

**Under alarm (Lower limit judgement)**

Comparison condition	Result
AL1 judgement value > Display value	AL1
AL2 judgement value > Display value	AL2
AL3 judgement value > Display value	AL3
AL4 judgement value > Display value	AL4

<b>Zone judgement mode</b>	The alarm is ON when between upper and lower judgement values (Inside zone) The alarm is ON when out of upper and lower judgement values (Outside zone)
----------------------------	--

**Inside zone alarm**

Comparison condition	Result
AL1 zone HI ≥ Display value ≥ AL1 zone LO	AL1
AL1 zone HI ≥ Display value ≥ AL2 zone LO	AL2
AL1 zone HI ≥ Display value ≥ AL3 zone LO	AL3
AL1 zone HI ≥ Display value ≥ AL4 zone LO	AL4

**Outside zone alarm**

Comparison condition	Result
Display value > AL1 zone HI or AL1 zone LO > Display value	AL1
Display value > AL2 zone HI or AL2 zone LO > Display value	AL2
Display value > AL3 zone HI or AL3 zone LO > Display value	AL3
Display value > AL4 zone HI or AL4 zone LO > Display value	AL4

**Difference judgement mode**

\*Alarm is ON when the (Max.-Min.) during the fixed time exceeds the change judgement value.

Comparison condition	Result
(Max.-Min.) during the fixed time ≥ AL1 judgement value	AL1
(Max.-Min.) during the fixed time ≥ AL2 judgement value	AL2
(Max.-Min.) during the fixed time ≥ AL3 judgement value	AL3
(Max.-Min.) during the fixed time ≥ AL4 judgement value	AL4

**Analog output**

\*Select either Ach, Bch or calculation results to be output.

<b>Conversion method</b>	D/A conversion method
<b>Resolution capability</b>	Equivalent of 13bit
<b>Scaling</b>	Digital scaling
<b>Response speed</b>	Up to 300μs (0→90% response)
<b>Specifications for each output</b>	Refer to the following chart.

Output type	Load resistance	Accuracy (23±5°C 35~85%RH)	Ripple
0~10V	≥2kΩ	±0.1% FS	±50mVp-p
-10~10V			
1~5V	≤500Ω		±25mVp-p
0~20mA			
4~20mA			

\*Ripple for current output is at load resistance 250Ω (20mA output)

**BCD Output**

\*Select either Ach, Bch or calculation results to be output.

<b>Output type</b>	Open collector output, NPN/PNP type
<b>Measurement data</b>	Negative logic. Transistor ON when logic is "1"
<b>Polarity signal</b>	Negative logic. Transistor ON when negative display
<b>Over signal</b>	Negative logic. Transistor ON when over display
<b>Print command signal</b>	Transistor ON for fixed period when data conversion
<b>Transistor capacity</b>	Voltage 30V max., Current 10mA max.
<b>Enable</b>	Output saturation voltage ≤1.2V at 10mA Output transistor turns OFF when the enable terminal is short with D.COM

**RS-232C communication**


<b>Communication protocol</b>	Modbus RTU*, Original command, Original output
<b>Synchronous system</b>	Asynchronous mode
<b>Communication method</b>	Full duplex
<b>Communication speed</b>	9600bps, 19200bps, 38400bps
<b>Data length</b>	7bit, 8bit
<b>Stop bit</b>	1bit, 2bit
<b>Parity bit</b>	None, Odd, Even
<b>Delimiter</b>	CR, CR+LF
<b>Character code</b>	ASCII
<b>Transmission control procedure</b>	Non-procedure
<b>Signal name</b>	TXD, RXD, SG
<b>No. of connectable units</b>	1 unit
<b>Line length</b>	15m

\*No data length / stop bit / delimiter settings when Modbus RTU protocol

**RS-485 communication**


<b>Communication protocol</b>	Modbus RTU
<b>Synchronous system</b>	Asynchronous mode
<b>Communication method</b>	2-wire half duplex
<b>Communication speed</b>	9600bps, 19200bps, 38400bps
<b>Data length</b>	8bit
<b>Stop bit</b>	1bit, 2bit
<b>Parity bit</b>	N/A, odd number, even number
<b>Signal name</b>	Non-inverting (+), inverting (-)
<b>No. of connectable units</b>	31 units
<b>Line length</b>	1.2km max (Total)

## Terminal Connections

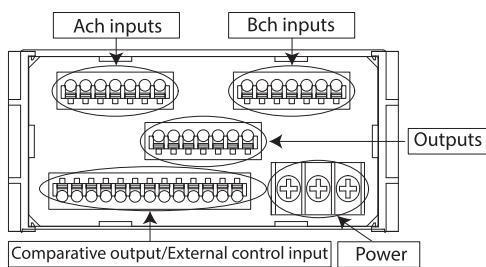

## Middle terminal (Option output)


- Analog output  
Compatible wire : AWG24 to 16



\*⑧⑩ are connected internally


- RS-232C

Compatible wire : AWG24 to 16



- RS-485


Compatible wire : AWG24 to 16



\*⑧⑩ are connected internally

- BCD


Compatible wire: AWG28 flat cable (1.27mm)

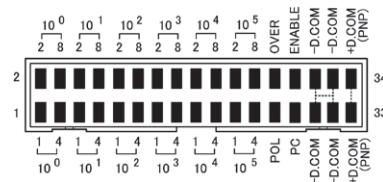


## Lower terminal

(External control / comparator output / power supply)


- Comparator output / External control  
Compatible wire : AWG24 to 16  
(Open collector output)

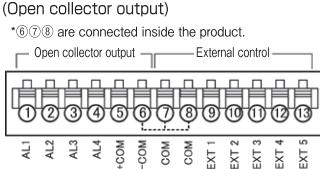

(Relay output)

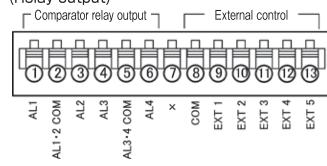

- Power supply




Applicable crimp terminal  
5.8mm or less, 5.8mm or less

## Upper terminal


(Input / GO output / sensor power supply)

- DC voltage input / GO output  
Compatible wire : AWG24 to 16  
(Ach DC voltage input)




\*⑮⑯ are connected internally

(Bch DC voltage input)




\*⑰⑱ are connected internally

- DC current input / GO output  
Compatible wire : AWG24 to 16  
(Ach DC current input)




\*⑮⑯ are connected internally

(Bch DC current input)




\*⑰⑱ are connected internally

- Process signal input / GO output  
Compatible wire : AWG24 to 16  
(Ach Process signal input)



\*⑮⑯ are connected internally


(Bch Process signal input)



\*⑰⑱ are connected internally

## Dimensions

(1/8 DIN size)

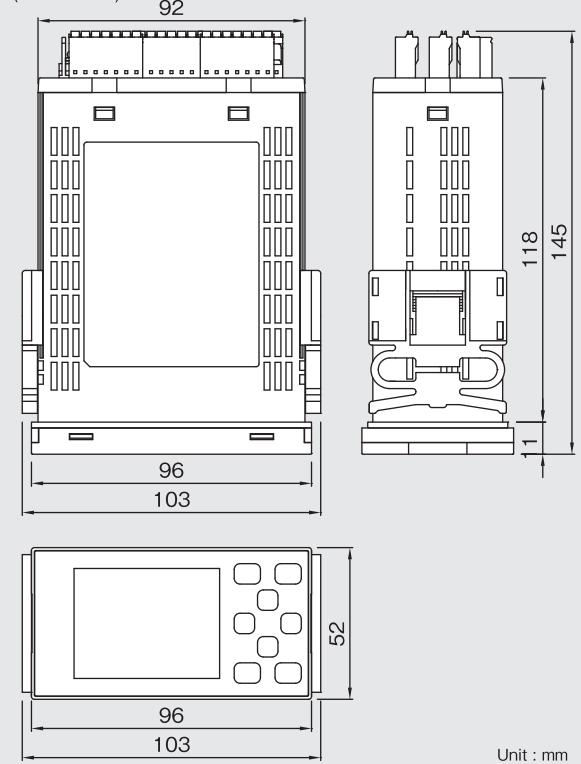

Unit : mm

## Panel cutout

