



RIGOL

HDO1000 Series

Digital Oscilloscope

Data Sheet

DSA32101-1110

Aug.2022

HDO1000 Series Digital Oscilloscope




Adopting RIGOL's
Brand New
Self-developed
Chipset "Centaurus"



Highlights

- Ultra-low noise floor for cleaner signals, measuring small signals more accurately
- 12-bit resolution ($2^{12}=4096$) to see the most signal detail
- Up to 1 GSa/s real-time sample rate
- A maximum of 100 Mpts memory depth, capturing more detailed signals over longer time spans
- Standard serial decoding: SPI, I2C, RS232/UART, CAN, and LIN
- 10.1-inch large HD touch display (1280 x 800) designed for better touch interactions
- Front-panel Flex Knobs, bringing smoother interaction and easier measurements



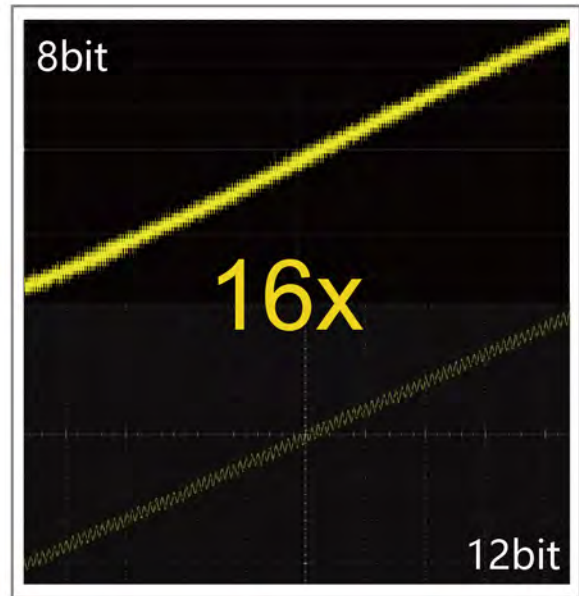

Entry Level
 High Resolution
 Digital Oscilloscope,
 Best Budget Oscilloscope
 for Beginners

Applications



An oscilloscope is an important tool for making power supply measurements. With up to 12-bit vertical resolution, the HDO1000 series makes it easy for you to perform ripple measurement and quality test.



Education

This series redefines what you can expect in an entry-level oscilloscope by providing excellent noise performance and 12-bit high resolution, providing basic functionality for higher education.



The 10.1-inch large HD touch display enables better view of signals. Large memory depth and the Autoscale function make it ready for testing of embedded system designs.



With standard CAN and LIN serial decoding functions, it provides a more affordable solution for automotive electronics testing.

Product Features

Product Features

- Brand-new chipset "Centaurus" developed by RIGOL
- Ultra-low noise floor for cleaner signals, measuring small signals accurately
- 12-bit vertical resolution^[1]
- 70/100/200 MHz analog bandwidth (selectable), 2/4 analog channels, and 1 EXT channel
- Up to 1 GSa/s real-time sample rate
- Max. memory depth: 100 Mpts (optional)
- Vertical sensitivity range: 500 μ V/div to 10 V/div
- Up to 1,500,000 wfms/s waveform capture rate with the UltraAcquire mode
- 10.1" 1280*800 HD touch display
- User-friendly Flex Knobs, bringing smoother interaction
- Standard photoelectric encoder operating knobs, effectively prolonging its service life
- Standard USB Device & Host, LAN, and HDMI interfaces






HDO1000 series digital oscilloscope is designed to meet the requirements for the design, debug, and test of the mainstream oscilloscope market. Adopting the brand-new chipset "Centaurus" developed by RIGOL, this series achieves a fast waveform capture rate of 1,500,000 wfms/s with the UltraAcquire mode, 100 Mpts memory depth, 12-bit vertical resolution, all combined with excellent noise floor performance and vertical accuracy to meet your requirements for more accurate measurements, bringing extraordinary T&M experience for you.








NOTE:






[1]: 16 bits in High Resolution mode.




RIGOL Probes and Accessories Supported by the Series

RIGOL Passive Probes

Model	Type	Description
High-impedance Probe		
 <p>PVP2150</p>	High-impedance Probe	<ul style="list-style-type: none"> Attenuation: 10:1/1:1 1X BW: DC~35 MHz 10X BW: DC~150 MHz Compatibility: All models of RIGOL's digital oscilloscopes
 <p>PVP2350</p>	High-impedance Probe	<ul style="list-style-type: none"> Attenuation: 10:1/1:1 1X BW: DC~35 MHz 10X BW: DC~350 MHz Compatibility: All models of RIGOL's digital oscilloscopes
 <p>PVP3150</p>	High-impedance Probe	<ul style="list-style-type: none"> Attenuation: 10:1/1:1 1X BW: DC~20 MHz 10X BW: DC~150 MHz Compatibility: All models of RIGOL's digital oscilloscopes
 <p>RP3500A</p>	High-impedance Probe	<ul style="list-style-type: none"> Attenuation: 10:1 BW: DC~500 MHz Compatibility: MSO/DS4000, DS6000, MSO/DS7000, MSO8000, HDO4000/2000/1000, and DS70000 series
High Voltage Single-ended Probe		
 <p>RP1010H</p>	High Voltage Probe	<ul style="list-style-type: none"> Attenuation: 1000:1 BW: DC~40 MHz DC: 0~10 kV DC AC: pulse ≤ 20 kVp-p AC: sine ≤ 7 kV_{rms} Compatibility: All models of RIGOL's digital oscilloscopes

Model	Type	Description
 <p>RP1018H</p>	High Voltage Probe	<ul style="list-style-type: none"> • Attenuation: 1000:1 • BW: DC~150 MHz • DC+AC_{Peak}: 18 kV CAT II • AC_{rms}: 12 kV CAT II • Compatibility: All models of RIGOL's digital oscilloscopes
 <p>RP1300H</p>	High Voltage Single-ended Probe	<ul style="list-style-type: none"> • Attenuation: 1000:1 • BW: DC~300 MHz • CAT I 2000 V (DC+AC) • CAT II 1500 V (DC+AC) • Compatibility: All models of RIGOL's digital oscilloscopes
High Voltage Differential Probe		
 <p>PHA0150</p>	High Voltage Differential Probe	<ul style="list-style-type: none"> • BW: DC~70 MHz • Max. voltage ≤ 1500 Vpp • Compatibility: All models of RIGOL's digital oscilloscopes
 <p>PHA1150</p>	High Voltage Differential Probe	<ul style="list-style-type: none"> • BW: DC~100 MHz • Max. voltage ≤ 1500 Vpp • Compatibility: All models of RIGOL's digital oscilloscopes
 <p>PHA2150</p>	High Voltage Differential Probe	<ul style="list-style-type: none"> • 50X BW: DC~160 MHz • 500X BW: DC~200 MHz • Max. voltage ≤ 1500 Vpp • Compatibility: All models of RIGOL's digital oscilloscopes
 <p>RP1025D</p>	High Voltage Differential Probe	<ul style="list-style-type: none"> • BW: DC~25 MHz • Max. voltage ≤ 1400 Vpp (DC + AC P-P) • Compatibility: All models of RIGOL's digital oscilloscopes
 <p>RP1050D</p>	High Voltage Differential Probe	<ul style="list-style-type: none"> • BW: DC~50 MHz • Max. voltage ≤ 7000 Vpp (DC + AC P-P) • Compatibility: All models of RIGOL's digital oscilloscopes

Model	Type	Description
 <p>RP1100D</p>	High Voltage Differential Probe	<ul style="list-style-type: none"> BW: DC~100 MHz Max. voltage ≤ 7000 Vpp (DC + AC P-P) Compatibility: All models of RIGOL's digital oscilloscopes
Current Probe		
 <p>RP1001C</p>	Current Probe	<ul style="list-style-type: none"> BW: DC~300 kHz Maximum Input AC: ± 100 A AC P-P: 200 A AC RMS: 70 A Compatibility: All models of RIGOL's digital oscilloscopes
 <p>RP1002C</p>	Current Probe	<ul style="list-style-type: none"> BW: DC~1 MHz Maximum Input AC: ± 70 A AC P-P: 140 A AC RMS: 50 A Compatibility: All models of RIGOL's digital oscilloscopes
 <p>RP1003C</p>	Current Probe	<ul style="list-style-type: none"> BW: DC~50 MHz Maximum Input AC P-P: 50 A (non-continuous) AC RMS: 30 A Compatibility: All models of RIGOL's digital oscilloscopes Required to order RP1000P power supply.
 <p>RP1004C</p>	Current Probe	<ul style="list-style-type: none"> BW: DC~100 MHz Maximum Input AC P-P: 50 A (non-continuous) AC RMS: 30 A Compatibility: All models of RIGOL's digital oscilloscopes Required to order RP1000P power supply.

Model	Type	Description
 <p>RP1005C</p>	Current Probe	<ul style="list-style-type: none"> • BW: DC~10 MHz • Maximum Input <p>AC P-P: 300 A (non-continuous), 500 A (@pulse width ≤ 30 us)</p> <p>AC RMS: 150 A</p> <ul style="list-style-type: none"> • Compatibility: All models of RIGOL's digital oscilloscopes • Required to order RP1000P power supply.
 <p>RP1006C</p>	Current Probe	<ul style="list-style-type: none"> • BW: DC~2 MHz • Maximum Input <p>AC P-P: 700 A peaks, non-continuous</p> <p>AC RMS: 500 A</p> <ul style="list-style-type: none"> • Compatibility: All models of RIGOL's digital oscilloscopes • Required to order RP1000P power supply.
 <p>RP1000P</p>	4CH Power Supply	<p>Four-channel power adapter for RP1003C, RP1004C, RP1005C, and RP1006C Current Probes.</p>

Specifications

All the specifications are guaranteed except the parameters marked with "Typical" and the oscilloscope needs to operate for more than 30 minutes under the specified operation temperature.

Overview of the HDO1000 Series Technical Specifications

Overview of the HDO1000 Series Technical Specifications						
Model	HDO1072	HDO1074	HDO1102	HDO1104	HDO1202	HDO1204
Analog Bandwidth (-3 dB)	70 MHz	70 MHz	100 MHz	100 MHz	200 MHz	200 MHz
Input Channels	2+EXT	4+EXT	2+EXT	4+EXT	2+EXT	4+EXT
Rise Time (10% to 90%, typical)	≤5 ns	≤5 ns	≤3.5 ns	≤3.5 ns	≤1.75 ns	≤1.75 ns
Sampling Mode	Real-time sampling					
Max. Sample Rate of Analog Channels	2-channel model: 1 GSa/s (single channel ^[1]), 500 MSa/s (all channels ^[3]) 4-channel model: 1 GSa/s (single channel ^[1]), 500 MSa/s (half channels ^[2]), 250 MSa/s (all channels ^[3])					
Standard Memory Depth	2-channel model: 50 Mpts (single channel ^[1]), 25 Mpts (all channels ^[3]) 4-channel model: 50 Mpts (single channel ^[1]), 25 Mpts (half channels ^[2]), 12.5 Mpts (all channels ^[3])					
Optional Memory Depth	2-channel model: 100 Mpts (single channel ^[1]), 50 Mpts (all channels ^[3]) 4-channel model: 100 Mpts (single channel ^[1]), 50 Mpts (half channels ^[2]), 25 Mpts (all channels ^[3])					
Max. Waveform Capture Rate	50,000 wfms/s (Vector Mode) 1,500,000 wfms/s (UltraAcquire Mode)					
Vertical Resolution	12 bits					
Hardware Real-time Waveform Recording and Playing	Up to 500,000 frames					
Peak Detect	Capture glitches as narrow as 2 ns					

Overview of the HDO1000 Series Technical Specifications

Display Size and Type 10.1-inch capacitive multi-touch display

Display Resolution 1280×800

Vertical System Analog Channels

Vertical System Analog Channels

Input Coupling	DC, AC, or GND
Input Impedance	1 MΩ ± 1%
Input Capacitance	19 pF ± 3 pF
Probe Attenuation Ratio	0.001X, 0.002X, 0.005X, 0.01X, 0.02X, 0.05X, 0.1X, 0.2X, 0.5X, 1X, 2X, 5X, 10X, 20X, 50X, 100X, 200X, 500X, 1000X, 2000X, 5000X
Maximum Input Voltage	CAT I 300 V _{rms} , 400 V _{pk} (DC + V _{peak}) Frequency derating (assumes sine wave input): 400 V _{pk} until 40 kHz. Then derates at 20 dB/dec until 6 V _{pk} .
Remarks	No transient overvoltage allowed whether the probe is used or not. Use this instrument only for measurements within its specified measurement category (not rated for CAT II, III, IV).
Vertical Resolution	12 bits
Effective Number of Bits (ENOB, Typical)	> 8
Input Sensitivity Range ^[4]	500 μV/div to 10 V/div
Offset Range	± 1 V (≤65 mV/div) ± 10 V (>65 mV/div, ≤270 mV/div) ± 20 V (>270 mV/div, ≤2.75 V/div) ± 100 V (>2.75 V/div, ≤10 V/div)
Dynamic Range	±4 div (12 bits)
Bandwidth Limit (Typical)	20 MHz, FULL; selectable for each channel

Vertical System Analog Channels

DC Vertical Gain Accuracy ^[4]	$\pm 2\%$ full scale
DC Vertical Offset Accuracy	≤ 200 mV/div (± 0.1 div ± 2 mV $\pm 1.5\%$ of offset setting) > 200 mV/div (± 0.1 div ± 2 mV $\pm 1.0\%$ of offset setting)
Channel-to-channel Isolation	$\geq 100:1$
ESD Tolerance	± 8 kV (for input BNC)

Horizontal System Analog Channels

Horizontal System Analog Channels

Time Base Range	2 ns/div to 1 ks/div Time base fine adjustment setting available	
Time Base Resolution	400 ps	
Time Base Accuracy	± 1.5 ppm ± 1 ppm/year	
Time-base Delay Time Range	Pre-trigger	-5 div
	Post-trigger	1 s or 100 div, whichever is greater
Δ Time Accuracy	\pm (time base accuracy x reading) \pm (0.001 x screen width) ± 50 ps	
Channel-to-channel Deskew	Channel-to-channel deskew range: ± 100 ns, accuracy: ± 1 ps	
Analog Channel-to-Channel Delay (Typical)	≤ 2 ns ^[5]	
Horizontal Mode	YT	Default mode
	XY	On channel 1/2/3/4
	SCAN	Time base ≥ 200 ms/div
	ROLL	Time base ≥ 50 ms/div or ≥ 100 ms/div (selectable), available to enter or exit the ROLL mode by turning the horizontal timebase knob

Acquisition System

Acquisition System	
Max. Sample Rate of Analog Channels	2-channel model: 1 GSa/s (single channel ^[1]), 500 MSa/s (all channels ^[3]) 4-channel model: 1 GSa/s (single channel ^[1]), 500 MSa/s (half channels ^[2]), 250 MSa/s (all channels ^[3])
Max. Memory Depth of Analog Channels	2-channel model (standard): 50 Mpts (single channel ^[1]), 25 Mpts (all channels ^[3])
	2-channel model (optional): 100 Mpts (single channel ^[1]), 50 Mpts (all channels ^[3])
	4-channel model (standard): 50 Mpts (single channel ^[1]), 25 Mpts (half channels ^[2]), 12.5 Mpts (all channels ^[3])
	4-channel model (optional): 100 Mpts (single channel ^[1]), 50 Mpts (half channels ^[2]), 25 Mpts (all channels ^[3])
Acquisition Mode	Normal Default mode
	Peak Detect Capture glitches as narrow as 2 ns
	Average Selectable from 2, 4, 8, 16...to 65,536
	High Resolution 14 bits, 16 bits
	UltraAcquire Up to 1,500,000 wfms/s waveform capture rate

Trigger System

Trigger System	
Trigger Sources	Analog channel (1~4), EXT TRIG, AC Line
Trigger Mode	Auto, Normal, and Single
Trigger Coupling	DC DC coupled trigger
	AC AC coupled trigger
	HF Reject High frequency reject, cutoff frequency ~75 kHz (internal trigger only)
	LF Reject Low frequency reject, cutoff frequency ~75 kHz (internal trigger only)

Trigger System

Noise Rejection	Increase delay for the trigger circuit (internal trigger only), on/off	
Trigger Holdoff Range	8 ns to 10 s	
Trigger Bandwidth	Internal	Analog bandwidth
	External	200 MHz
Trigger Sensitivity	Internal	0.50 div, ≥ 50 mV/div 0.7 div (with noise rejection enabled)
	External	200 mVpp, from DC to 100 MHz 500 mVpp, from 100 MHz to 200 MHz
EXT TRIG	Input Impedance	1 M Ω \pm 1%, BNC connector
	Trigger Jitter (Typical)	< 1 ns _{rms} Normal acquisition, Edge trigger, trigger level located near 50% of EXT input signal
Trigger Level Range	Internal	± 5 div from center screen
	External	± 5 V
	AC Line	fixed 40%-60%

Trigger Type

Trigger Type

Trigger Type	Edge trigger, Pulse trigger, Slope trigger, Video trigger, Pattern trigger, Duration trigger, Timeout trigger, Runt trigger, Window trigger, Delay trigger, Setup/Hold trigger, Nth Edge trigger, I2C, SPI, RS232/UART, CAN, LIN
Edge	Triggers on the threshold of the specified edge of the input signal. The edge types can be Rising, Falling, or Either. Source channel: CH1~CH4, EXT, or AC Line
Pulse Width	Triggers on the positive or negative pulse, whose time duration is less than a value, greater than a value, or inside a time range. Source channel: CH1~CH4

Trigger Type

Slope	<p>Triggers on the positive or negative slope of the specified time, whose time is less than a value, greater than a value, or inside a time range.</p> <p>Source channel: CH1~CH4</p>
Video	<p>Trigger on all lines, specified line, odd/even fields that conform to the video standards. The supported video standards include NTSC, PAL/SECAM, 480p/60Hz, 576p/50Hz, 720p/60Hz, 720p/50Hz, 720p/30Hz, 720p/25Hz, 720p/24Hz, 1080p/60Hz, 1080p/50Hz, 1080p/25Hz, 1080p/24Hz, 1080i/60Hz, and 1080i/50Hz.</p> <p>Source channel: CH1~CH4</p>
Pattern	<p>Identifies a trigger condition by searching for a specified pattern. The pattern is a combination of multiple selected channel sources. The logic pattern of each channel is H, L, X, Rising, or Falling.</p> <p>Source channel: CH1~CH4</p>
Duration	<p>Triggers when the specified pattern meets the specified duration condition. The pattern is a combination of multiple selected channel sources. The logic pattern of each channel is H, L, and X. The duration is less than a value, greater than a value, inside a time range, or outside a time range.</p> <p>Source channel: CH1~CH4</p>
Timeout	<p>Triggers when duration of a certain event exceeds the specified time. The event can be specified as Rising, Falling, or Either.</p> <p>Source channel: CH1~CH4</p>
Runt	<p>Triggers when the pulses pass through one threshold but fail to pass through another threshold.</p> <p>Source channel: CH1~CH4</p>
Window	<p>Triggers in a specified window state when the rising edge of the signal crosses the upper threshold or the falling edge crosses the lower threshold. The window state can be Enter, Exit, or Time.</p> <p>Source channel: CH1~CH4</p>
Delay	<p>Triggers when the time difference between the specified edges of Source A and Source B meets the preset time. The delay time is less than a value, greater than a value, inside a time range, or outside a time range.</p> <p>Source channel: CH1~CH4</p>
Setup/Hold	<p>When the setup time or hold time between the input clock signal and the data signal is smaller than the specified time.</p> <p>Source channel: CH1~CH4</p>
Nth Edge	<p>Triggers on the Nth edge after the specified idle time. The edge can be specified as Rising or Falling.</p> <p>Source channel: CH1~CH4</p>

Trigger Type

RS232/UART	Triggers on the Start, Error, Check Error, or Data frame of the RS232/UART bus (up to 20 Mb/s). Source channel: CH1~CH4
I2C	Triggers on the Start, Stop, Restart, MissedACK, Address (7 bits, 8 bits, or 10 bits), Data, or Address Data of the I2C bus. Source channel: CH1~CH4
SPI	Triggers on the specified pattern of the specified data width (4 to 32) of SPI bus. CS and Timeout are supported. Source channel: CH1~CH4
CAN	Triggers on the start of a frame, end of a frame, Remote ID, Overload, Frame ID, Frame Data, Data&ID, Frame Error, Bit Fill, Answer Error, Check Error, Format Error, and Random of the CAN signal (up to 5 Mb/s). The supported CAN bus signal types include CAN_H, CAN_L, TX/RX, and DIFF. Source channel: CH1~CH4
LIN	Triggers on the Sync, ID, Data (length settable), Data&ID, Wakeup, Sleep, and Error of the LIN bus signal (up to 20 Mb/s). Source channel: CH1~CH4

Search & Navigate

Search & Navigate

Type	Edge, pulse width
Source	Analog channels
Copy	Copy to/from trigger; independent settings including threshold and trigger condition setup
Result Display	Event lister or be exported to external/internal memory
Navigate	Time: view acquired waveforms in time order
	Event: use the navigation controls to go to found search events
	Segment: use the navigation controls to play through the acquired segments in UltraAcquire mode

Waveform Measurement

Waveform Measurement		
	Number of Cursors	2 pairs of XY cursors
	Manual Mode	Voltage deviation between cursors (ΔY) Time deviation between cursors (ΔX) Reciprocal of ΔX (Hz) ($1/\Delta X$)
Cursor	Track Mode	Fix Y-axis to track X-axis waveform point's voltage and time values Fix X-axis to track Y-axis waveform point's voltage and time values
	Auto Measurement	Allow to display cursors during auto measurement
	XY Mode	Measures the voltage parameters of the corresponding channel waveforms in XY time base mode X = Channel 1, Y = Channel 2

Waveform Measurement

	Number of Measurements	41 auto measurements; and up to 14 measurements can be displayed at a time.
	Measurement Source	CH1 to CH4, Math1 to Math4
	Measurement Range	Main, Zoom
	All Measurements	Displays 33 measurement items (vertical and horizontal) for the current measurement channel; the measurement results are updated continuously.
Auto Measurement	Vertical	Vmax, Vmin, Vpp, Vtop, Vbase, Vamp, Vupper, Vmid, Vlower, Vavg, VRMS, Per. VRMS, Overshoot, Preshoot, Area, Period Area, and AC RMS.
	Horizontal	Period, Frequency, Rise Time, Fall Time, +Width, -Width, +Duty, -Duty, Positive Pulse Count, Negative Pulse Count, Rising Edge Count, Falling Edge Count, Tvmax, Tvmin, +Slew Rate, and -Slew Rate
	Others	Delay (A↑-B↑), Delay (A↑-B↓), Delay (A↓-B↑), Delay (A↓-B↓), Phase (A↑-B↑), Phase (A↑-B↓), Phase (A↓-B↑), and Phase (A↓-B↓)
	Statistics	Items: Current, Average, Max, Min, Standard Deviation, Count Statistical times settable

Waveform Math

Waveform Math

	Number of Math Functions	4, displays 4 math functions simultaneously
	Arithmetic	A+B, A-B, A×B, A/B, FFT, A&&B, A B, A^B, !A, Intg, Diff, Lg, Ln, Exp, Sqrt, Abs, AX+B, LowPass, HighPass, BandPass, and BandStop
	Color Grade	FFT supported

Waveform Math

	Record Size	Up to 1 Mpts
FFT	Window Type	Rectangular, Blackman-Harris, Hanning (default), Hamming, Flattop, and Triangle
	Peak Search	A maximum of 15 peaks, confirmed by the settable threshold and offset threshold set by users

Waveform Analysis

Waveform Analysis

		Store the signal under test in segments according to the trigger events, i.g. save all the sampled waveform data as a segment to the RAM for each trigger event. The maximum number of the sampled segments reaches 500,000.
Waveform Recording	Source	All enabled analog channels
	Analysis	Support playing frame by frame or continuous playing; capable of calculating, measuring, and decoding the played waveforms
Pass/Fail Test		Compare the signal under test with the user-defined mask to provide the test results: the number of successful tests, failed tests, and the total number of tests. The pass/fail event can enable immediate stop, beeper, and the screenshot.
	Source	Any analog channel
Color Grade		A dimensional view for color grade waveforms, color grade > 16, 256-level color scale display
	Source	Any analog channel
	Color Theme	Temperature and intensity
	Mode	All modes available

Serial Decoding

Serial Decoding

No. of Decodings	4, decodes and enables/disables four protocol types simultaneously
Decoding Type	Standard: Parallel, RS232/UART, I2C, SPI, LIN, CAN

Serial Decoding

Parallel	Up to 4 bits of Parallel decoding, available for any analog channel User-defined clock and auto clock settings are supported. Source channel: CH1~CH4
RS232/UART	Decodes the RS232/UART (up to 20 Mb/s) bus's TX/RX data (5 to 9 bits), parity (Odd, Even, or None), and stop bits (1 to 2 bits) Source channel: CH1~CH4
I2C	Decodes the address (with or without the R/W bit) of the I2C bus, data, and ACK. Source channel: CH1~CH4
SPI	Decodes the MISO/MOSI data (4 to 32 bits) of the SPI bus. Timeout and CS are supported. Source channel: CH1~CH4
CAN	Decodes the remote frame (ID, byte number, CRC), overload frame, and data frame (standard/extended ID, control domain, data domain, CRC, and ACK) of the CAN bus (up to 5 Mb/s). The supported CAN bus signal types include CAN_H, CAN_L, TX/RX, and DIFF. Source channel: CH1~CH4
LIN	Decodes the protocol version (1.X or 2.X) of the LIN bus (up to 20 Mb/s). The decoding displays sync, ID, data, and check sum. Source channel: CH1~CH4

Auto

Auto

AutoScale	Minimum voltage greater than 10 mVpp, duty cycle greater than 1%, and frequency over 35 Hz
-----------	--

Digital Voltmeter

Digital Voltmeter

Source	Any analog channel
Function	DC, AC+DC _{rms} , AC _{rms}
Resolution	ACV/DCV: 4 bits
Limits Beeper	Support Upper/lower limit settings; sounds an alarm when the voltage value is inside or outside of the limit range

Precision Counter

Precision Counter		
Source		Any analog channel and EXT
Measurement		Frequency, period, totalize
Totalizer	Resolution	3 to 6 digits, user-defined
	Max. Frequency	Maximum analog bandwidth
Totalizer		48-bit totalizer
		Counts the number of the rising edges
Time Reference		Internal Reference

Command Set

Command Set	
Common Commands Support	Standard SCPI commands
Error Message Definition	Error Message
Support Status Report Mechanism	Status Reporting
Support Sync Mechanism	Synchronization

Display

Display	
LCD	10.1-inch capacitive multi-touch gesture-enabled display
Resolution	1280×800 (Screen Region) 16:9
Graticule	10 vertical divisions x 8 horizontal divisions
Persistence	Off, Infinite, variable persistence (100 ms to 10 s)
Brightness	256 intensity levels (LCD, HDMI)

Processor System

Processor System	
Processor	Cortex-A72, 1.8 GHz, hexa-core
System Memory	4 GB RAM

Processor System

Operating System Android

Internal Non-volatile Memory 8 GB

I/O

I/O

USB3.0 Host 2 on the front panel

USB3.0 Device 1 on the rear panel

LAN Port 1 on the rear panel, 10/100/1000 Base-T, supporting LXI-C

Web Control Support Web Control interface (input the IP address of the oscilloscope into the Web browser to display the operation interface of the oscilloscope)

BNC output on the rear panel

$V_o(H) \geq 2.5\text{ V}$ open circuit, $\geq 1.0\text{ V } 50\ \Omega$ to GND

$V_o(L) \leq 0.7\text{ V}$ to load $\leq 4\text{ mA}$; $\leq 0.25\text{ V } 50\ \Omega$ to GND

AUX Out Trig Out Output a pulse signal when the oscilloscope is triggered

Pass/Fail Output a pulse signal when a pass/fail event occurs.
Support user-defined pulse polarity and pulse time (10 ns to 10 ms)

Rise Time $\leq 1.2\text{ ns}$

10 MHz Reference Input Interface 1, BNC connector on the rear panel

Clock Output Interface 1, BNC connector on the rear panel

In/Out Input Mode 50 Ω , with the amplitude 130 mVpp to 4.1 Vpp (-10 dBm, 20 dBm), frequency 10 MHz \pm 10 ppm

Output Mode 50 Ω , 1.5 Vpp sine waveform

HDMI 1 on the rear panel, HDMI 1.4, A plug; used to connect an external monitor or projector

Probe Compensation 1 kHz frequency, 0 to 3 V amplitude, Square Output

Power

Power	
Power Voltage	100 to 240 V, 45 to 440 Hz
Power	Up to 200 W (connect to various interfaces, USB, and active probes)
Fuse	3.15 A, T degree, 250 V

Environment

Environment		
Temperature Range	Operating	0°C to +50°C
	Non-operating	-30°C to +60°C
Humidity Range	Operating	below +30°C: ≤90% RH (without condensation)
		+30°C to +40°C, ≤75% RH (without condensation)
	Non-operating	+40°C to +50°C, ≤45% RH (without condensation)
		below 60°C: ≤90% RH (without condensation)
Altitude	Operating	Below 3,000 m
	Non-operating	Below 15,000 m

Warranty and Calibration Interval

Warranty and Calibration Interval	
Warranty	Three years for the mainframe, excluding the probes and accessories.
Recommended Calibration Interval	18 months

Regulations

Regulations	
	Compliant with EMC DIRECTIVE 2014/30/EU, compliant with or higher than the standards specified in IEC 61326-1:2013/EN 61326-1:2013 Group 1 Class A
	CISPR 11/EN 55011
Electromagnetic Compatibility	IEC 61000-4-2:2008/EN 61000-4-2 ±4.0 kV (contact discharge), ±8.0 kV (air discharge)
	IEC 61000-4-3:2002/EN 61000-4-3 3 V/m (80 MHz to 1 GHz); 3 V/m (1.4 GHz to 2 GHz); 1 V/m (2.0 GHz to 2.7 GHz)
	IEC 61000-4-4:2004/EN 61000-4-4 1 kV power line
	IEC 61000-4-5:2001/EN 61000-4-5 0.5 kV (phase-to-neutral voltage); 1 kV (phase-to-earth voltage); 1 kV (neutral-to-earth voltage)
	IEC 61000-4-6:2003/EN 61000-4-6 3 V, 0.15-80 MHz
	IEC 61000-4-11:2004/EN 61000-4-11 Voltage dip: 0% UT during half cycle; 0% UT during 1 cycle ; 70% UT during 25 cycles short interruption: 0% UT during 250 cycles
Safety	
Vibration	Meets GB/T 6587; class 2 random Meets MIL-PRF-28800F and IEC60068-2-6; class 3 random

Regulations

	Meets GB/T 6587-2012; class 2 random
Shock	Meets MIL-PRF-28800F and IEC 60068-2-27; class 3 random
	In non-operating conditions: 30 g, half-sine wave, 11 ms duration, 3 shocks along the main axis, total of 18 shocks

Mechanical Characteristics

Mechanical Characteristics

Dimensions	358.14 mm (W)×214.72 mm (H)×120.62 mm (D)
------------	---

Rack Mount Kit	4U
----------------	----

Weight ^[6]	Net: 3.8 kg
	Shipping: 5.37 kg

Non-volatile Memory

Non-volatile Memory

	Setup/Image	setup (*.stp), image (*.png, *.bmp, *.jpg)
Data/File Storage	Waveform Data	CSV waveform data (*.csv), binary waveform data (*.bin), list data (*.csv), and reference waveform data (*.ref, *.csv, *.bin)
Internal Capacity		8 GB
Reference Waveform		Displays 10 internal waveforms
Setting		Limited by size of USB drive
USB Capacity		Industry standard flash drives

NOTE:

[1]: If any one of the channels is enabled, it is called single channel mode.

[2]: For 4-channel models, if two of the channels are enabled, it is called half channels mode.

[3]: For 2-channel models, if two channels are enabled, it is called all channels mode. For 4-channel models, if any three channels or all four channels are enabled, it is called all channels mode.

[4]: 500 μ V/div is a magnification of 1 mV/div setting. For vertical accuracy calculations, use full scale of 8 mV for sensitivity setting.

[5]: For any channel, under the same input impedance with DC-coupled, the Volts/div setting is the same for 100 mV/div and 200 mV/div setting.

[6]: Standard configuration.

Order Information and Warranty Period

Order Information

Order Information	Order No.
Base Unit	
70 MHz, 1 GSa/s, 50 Mpts, 2CH DHO	HDO1072
70 MHz, 1 GSa/s, 50 Mpts, 4CH DHO	HDO1074
100 MHz, 1 GSa/s, 50 Mpts, 2CH DHO	HDO1102
100 MHz, 1 GSa/s, 50 Mpts, 4CH DHO	HDO1104
200 MHz, 1 GSa/s, 50 Mpts, 2CH DHO	HDO1202
200 MHz, 1 GSa/s, 50 Mpts, 4CH DHO	HDO1204
Standard Accessories	
Power cord (based on destination country)	— —
USB Cable	— —
4 Passive HighZ Probes (350 MHz) Standard for HDO1204, 2 Passive HighZ Probes (350 MHz) Standard for HDO1202	PVP2350
4 Passive HighZ Probes (150 MHz), Standard for HDO1104/HDO1074	PVP3150
2 Passive HighZ Probes (150 MHz), Standard for HDO1102/HDO1072	PVP3150
Bandwidth Upgrade Option	
70 MHz to 100 MHz Upgrade Option	HDO1000-BWU7T10
70 MHz to 200 MHz Upgrade Option	HDO1000-BWU7T20
100 MHz to 200 MHz Upgrade Option	HDO1000-BWU10T20
Memory Depth Upgrade Option	
100 Mpts Memory Depth Upgrade Option	HDO1000-RLU-01


NOTE:

For all the base units, accessories, and options, please contact the local office of RIGOL.

Warranty Period

Three years for the mainframe, excluding the probes and accessories.

Option Ordering and Installation Process

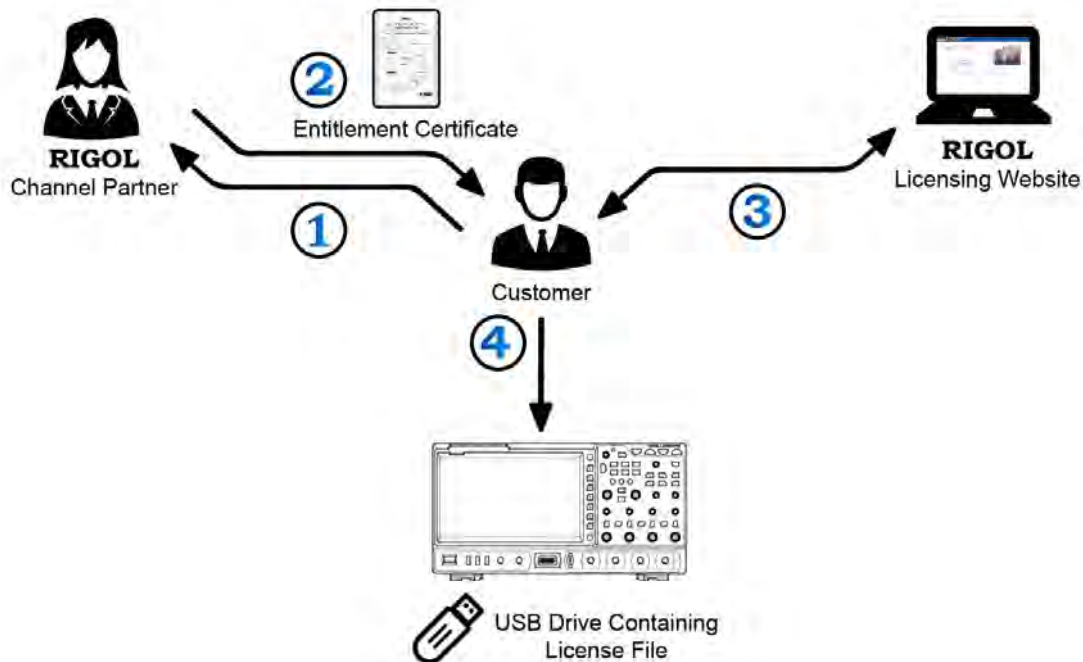

1. According to the usage requirements, please purchase the specified function options from **RIGOL Sales Personnel**, and provide the serial number of the instrument that needs to install the option.
2. After receiving the option order, the **RIGOL** factory will mail the paper software product entitlement certificate to the address provided in the order.
3. Log in to **RIGOL** official website for registration. Use the software key and instruments serial number provided in the entitlement certificate to obtain the option license code and the option license file.
4. Download the option license file to the root directory of the USB storage device, and connect the USB storage device to the instrument properly. After the USB storage device is successfully recognized, the **Option install** menu is activated. Press this menu key to start installing the option.

HEADQUARTER

RIGOL TECHNOLOGIES CO., LTD.
No.8 Keling Road, New District, Suzhou,
JiangSu, P.R.China
Tel: +86-400620002
Email: info@rigol.com

EUROPE

RIGOL TECHNOLOGIES EU GmbH
Carl-Benz-Str.11
82205 Gilching
Germany
Tel: +49(0)8105-27292-0
Email: info-europe@rigol.com

NORTH AMERICA

RIGOL TECHNOLOGIES, USA INC.
10220 SW Nimbus Ave.
Suite K-7
Portland, OR 97223
Tel: +1-877-4-**RIGOL**-1
Fax: +1-877-4-**RIGOL** 1
Email: info@rigol.com

JAPAN

RIGOL JAPAN CO., LTD.
501, LATORRETTA, 2-37-1,
Numabukuro,
Nakano-Ku, Tokyo, Japan
Tel: +81-3-6262-8932
Fax: +81-3-6262-8933
Email: info-japan@rigol.com

RIGOL® is the trademark of **RIGOL TECHNOLOGIES CO., LTD.** Product information in this document subject to update without notice. For the latest information about **RIGOL**'s products, applications and services, please contact local **RIGOL** channel partners or access **RIGOL** official website: www.rigol.com