

# ***BX-C210 Series***

*Embedded Fan-less System  
with Intel® Celeron® Apollo Lake Platform*




***BX-C210-G***



***BX-C211-G***




***BX-C212-G***

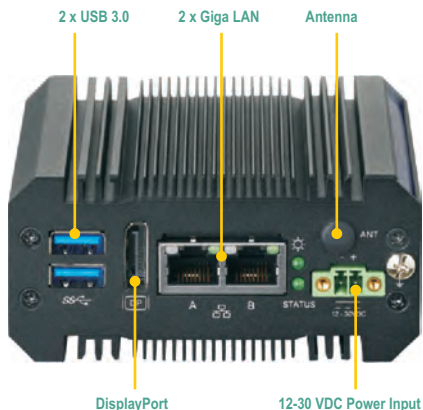

## BX-C210-G

### Features


- m~ääJëáòÉÇ=ëã~ää=Ñçëã=Ñ~Áíçê
- NOJPM=sa`=-OMB=íáÇÉ=íçáí~ÖÉ=éçíÉê=ááéíí=
- SQd\_=çãÄç~êÇ=Éjj`=RKM=ëíçê~ÖÉ
- c~ääÉëë=~ãÇ=`~ÄäÉäÉëë=ÇÉëáÖá=éÉÇíÁÉ=ã~ááíÉá~áÁÉ=íçêá
- oáÄÜ=fLI=`çãÄää~íáçã=íç=ÑíäÑäää=ÁíëíçãÉëë=áá=í~éáçíë=áÉÉÇë=

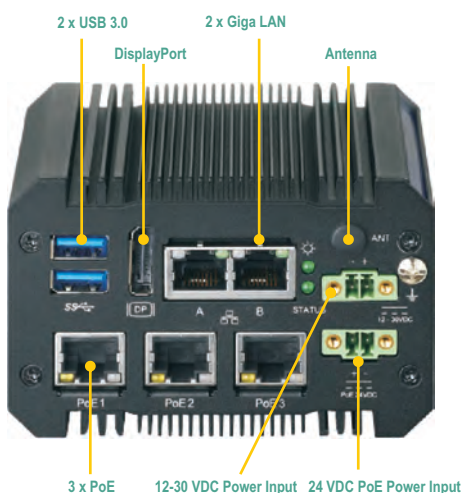

## BX-C211-G

### Features

- m~ääJëáòÉÇ=ëã~ää=Ñçëã=Ñ~Áíçê
- NOJPM=sa`=-OMB=íáÇÉ=íçáí~ÖÉ=éçíÉê=ááéíí=
- SQd\_=çãÄç~êÇ=Éjj`=RKM=ëíçê~ÖÉ
- c~ääÉëë=~ãÇ=`~ÄäÉäÉëë=ÇÉëáÖá=éÉÇíÁÉ=ã~ááíÉá~áÁÉ=íçêá
- bñíê~P=ñ=mçb=éçêí=Ñçê=ÁíëíçãÉëë=íáíÜ=`~ãÉê~çê=táéÉäÉëë=áÉÉ

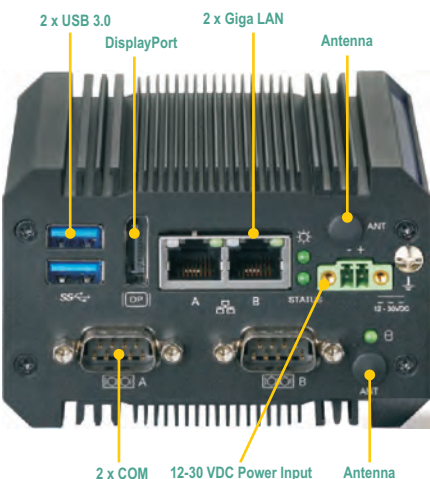

## BX-C212-G

### Features

- m~ääJëáòÉÇ=ëã~ää=Ñçëã=Ñ~Áíçê
- NOJPM=sa`=-OMB=íáÇÉ=íçáí~ÖÉ=éçíÉê=ááéíí=
- SQd\_=çãÄç~êÇ=Éjj`=RKM=ëíçê~ÖÉ
- c~ääÉëë=~ãÇ=`~ÄäÉäÉëë=ÇÉëáÖá=éÉÇíÁÉ=ã~ááíÉá~áÁÉ=íçêá
- ^ÇÇáíáçã~ä=O=ñ=lj=~ãÇ=Éñé~ääáçã=ëäçíëÑíëçãçãííáçãë

## BX-C210 Series

### Optional Configuration


- Ud\_=çãÄ~çêÇ=imaaQJONPP=ãÉäçêó
- SMT=mçíÉê^Ç~éíÉê=OQsL=OKR^
- tááÇçíë ® NM=fçqbaíÉéééäéçpi=OMNS=SQ=Äáí
- tááÇçíëÖNM=fçq=baíÉéééäéçpi=OMNV=SQ=Äáí
- ááééä~ómççíç=sd^ ^Ç~éíÉêKNRMää=
- ááééä~ómççéí=íç=asfMç~éíÉêKNRMää
- t ~ää=ãçíáí=Äê~ÁáÉí
- afk=o~ää=Äê~ÁáÉí



BX-C210-G

BX-C211-G

BX-C212-G

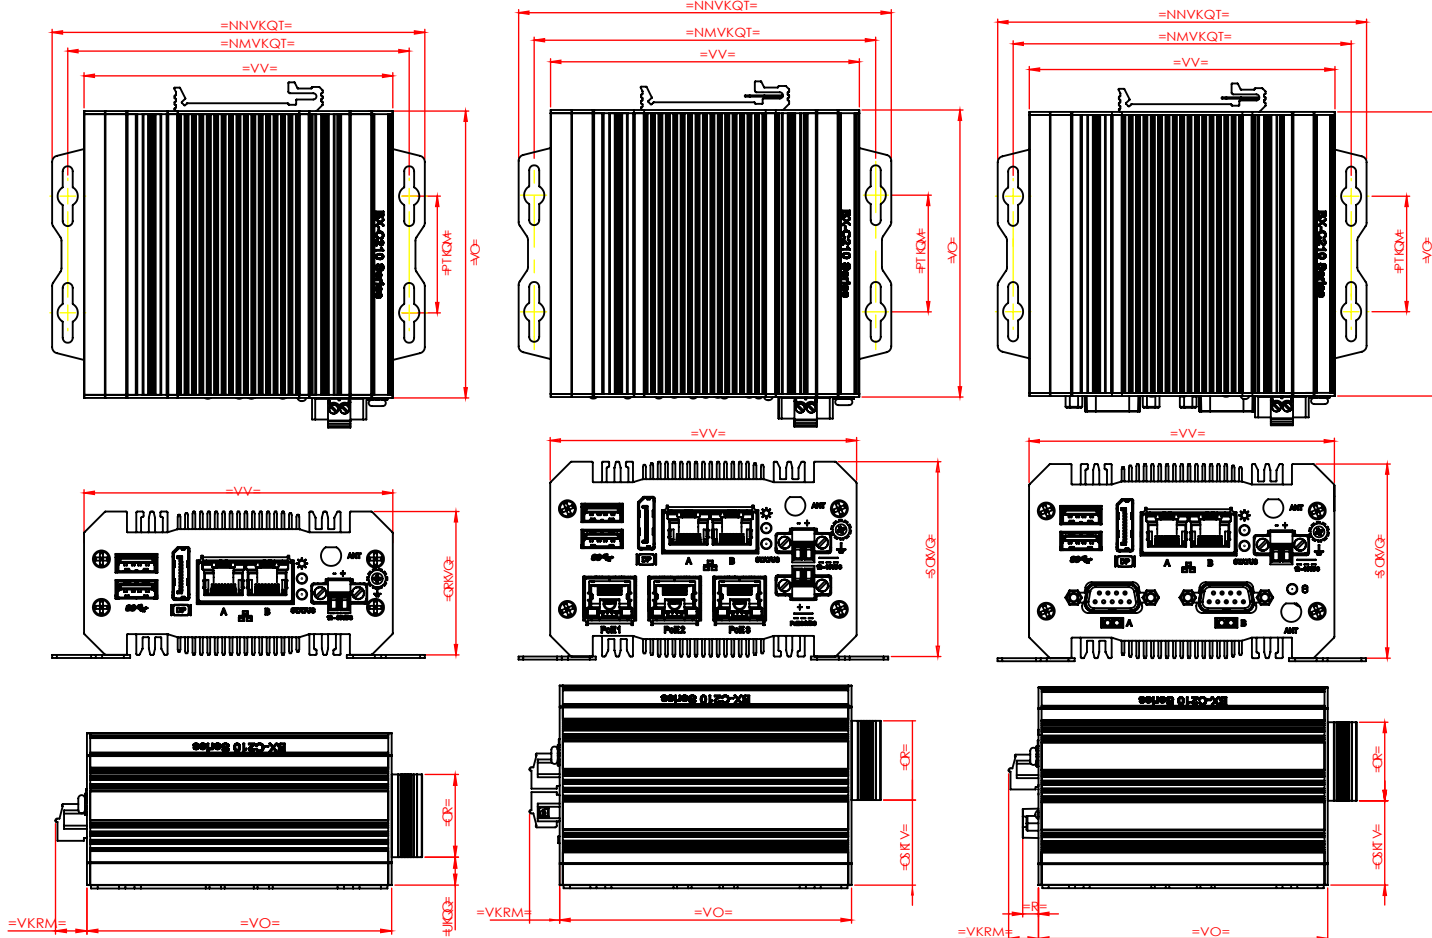

Specifications		BX-C210-G	BX-C211-G	BX-C212-G
Specifications	CPU	Intel® Xeon® Processor E-2100 Series		
	Mass Storage	2x SATA 6Gb/s		
	Memory	8x DIMM slots, DDR4-2666, up to 64GB		
	Power Input	1x AC Power Input, 1x DC Power Input		
	OS support	Windows Server 2016, Linux		
Basic I/O Interface	Power Connection	1x AC Power Input, 1x DC Power Input		
	Ethernet	2x RJ45 ports		
	USB	2x USB 3.0 ports		
	Display	1x VGA port		
	Expansion	1x PCIe slot		
Environment	Operating Temperature	5°C to 35°C		
	Storage Temperature	-20°C to 60°C		
	Vibration	0.5g to 2g		
	Shock	10g to 20g		
	Operation Altitude	0m to 3000m		
Mechanical	Certification	CE, FCC, RoHS		
	Degree of Protection	IP20		
	Mounting	1U rack mountable		
	Cooling	Passive cooling		
	Dimension (L x H x W) mm	447 x 175 x 447	447 x 175 x 447	447 x 175 x 447
Extended I/O Interface	Net Weight (kg)	1.5	1.5	1.5
	Additional Power Input (PoE)	1x PoE	1x PoE	1x PoE
	PoE	1x PoE	1x PoE	1x PoE
	COM	1x COM	1x COM	1x COM
	Expansion Slot	1x PCIe	1x PCIe	1x PCIe

BX-C210 Series Ordering Guide	
Model	BX-C210-G
Configuration	1x CPU, 8x DIMM, 2x SATA, 1x PoE, 1x COM, 1x PCIe
Weight	1.5 kg