

FA-PC
VPC Series
VPC-1600 Series



This product is a BTO industrial computer that is equipped with a CPU Intel Core i5 4570TE processor (2.7GHz) or Celeron G1820TE processor (2.2GHz). The Intel® Q87 chipset with DDR3 memory (4GB, 8GB, or 16GB) provides advanced computing and graphical performance. This product features a variety of interfaces such as 4 USB3.0 ports (rear: 4), 4 USB2.0 ports (front:2, rear:2), 2 1000BASE-T ports, 1 RS-232 port, and 1 parallel port.

Intel, Intel Atom, Intel Core and Celeron are registered trademarks of Intel Corporation. MS, Microsoft and Windows are trademarks of Microsoft Corporation. Other brand and product names are trademarks of their respective holder.

* Specifications, color and design of the products are subject to change without notice.

Standard Model (Stock Model whose setup had finished)

Model	CPU	Memory	HDD	Optical system	OS
VPC-1600-17225B	Celeron G1820TE	DDR3 4GB	SATA 2TB	DVD Super Multi Drive	Windows 7 Professional SP1 32bit Japanese
VPC-1600-57225B	Core i5 4570TE		SATA 2TB Hardware Mirroring		Windows 10 IoT Enterprise 2016 LTSB 64bit JPN/ENU/CHS/KOR
VPC-1600-57725B			SATA 2TB		
VPC-1600-572313B			SATA 2TB		

BTO Custom Model (BTO Menu)

Model	CPU	Memory	HDD	Optical system	OS
VPC-1600-17000B	Celeron G1820TE	DDR3 4GB	SATA 250GB (Discontinued)	DVD Super Multi Drive	None
			SATA 2TB		Windows 7 Professional SP1 32bit Japanese
		DDR3 8GB	SATA 2TB HDD Hardware Mirroring (250GB Discontinued)		Windows 7 Professional SP1 64bit Japanese
SATA 2TB Software Mirroring (250GB Discontinued)	Windows 7 Ultimate SP1 32bit JPN/ENU/CHS				
VPC-1600-57000B	Core i5 4570TE	DDR3 16GB	SATA 2TB Software Mirroring (250GB Discontinued)		Windows 7 Ultimate SP1 64bit JPN/ENU/CHS/KOR
					Windows Embedded 8.1 Industry Pro 64bit Japanese
				Windows 10 IoT Enterprise 2016 LTSB 64bit JPN/ENU/CHS/KOR	

*HDD 250GB Discontinued

Features

Equipped with a low power consumption CPU

The VPC-1600 series uses an Intel® embedded-style, low power consumption CPU.

Intel® Q87 Chipset is adopted

Employing an embedded-style chipset, the VPC-1500 series has achieved a long-term stable supply.

It corresponds to mirroring (RAID1)

Mirroring that matches the given application enables the construction of redundant systems.

[Software RAID], [Hardware RAID]

Supports high-speed high-capacity memory

The VPC-1600 series supports DDR3 SDRAM DIMM modules (4GB to 16GB in total) designed for high-speed transfer speed, flexibly addressing memory-consuming applications such as image processing.

Supported OS

- Windows 7 Professional SP1 32bit Japanese
- Windows 7 Professional SP1 64bit Japanese
- Windows 7 Ultimate SP1 32bit Japanese/English/Chinese
- Windows 7 Ultimate SP1 64bit Japanese/English/Chinese/Korean
- Windows Embedded 8.1 Industry Pro 64bit Japanese
- Windows 10 IoT Enterprise 2016 LTSB 64bit Japanese/English/Chinese/Korean

Specifications

Function specification

Item	Specification
CPU *1	Core i5 4570TE ----- 2.7GHz Celeron G1820TE -- 2.2GHz
Chipset	Intel® Q87
BIOS ROM	AMI BIOS
Memory *1	4GB(4GBx1), 8GB(4GBx2) DDR3 SDRAM (Non-ECC)
Hard disk drive	- SATAIII 3.5" HDD 2TB (Software/Hardware *2) RAID - SATAIII 3.5" HDD 2TB x1 or x2
Optical drive	DVD super multi drive Max. reading speed DVD-ROM x8, CD-ROM x24 Max. writing speed DVD+/-R x8, DVD+/-R-DL x8, DVD-RW x6, DVD+R x8, DVD-RAM x5, CD-R x24, CD-RW x24
Display	Both analog and digital DVI-I 29pin, DisplayPort 20pin
USB	USB2.0 compliant front 2port, Rear 2 port, USB3.0 compliant Rear 4port
PS/2	2port (Keyboard/Mouse)
Audio	Realtek ALC892-GR, Line Out, Line In, Mic In
Serial	RS-232C : 3 or 4 port (SERIAL PORTA, B,C,D) 9pin D-SUB Connector (Male)
Parallel	1port D-SUB 25pin(Female)
LAN port	2port (100BASE-TX/1000BASE-T RJ45)
Digital I/O	Front : LED Output x2 *5 Rear : Output 2 point, Input : 4 point (Software API support, User Application available)
RAS function	WDT : 1sec~255sec (Resetting operation by end) Remote reset/Remote power on External input signal Software RAS function (Fan rotation, temperature, Voltage data reading)
Extended slot	PCI x3 *6 *7 Installation max : 176.41mm(L) x 106.68mm(H)
OS	Windows 7 Professional SP1 32bit Japanese Windows 7 Professional SP1 64bit Japanese Windows 7 Ultimate SP1 32bit Japanese/English/Chinese Windows 7 Ultimate SP1 64bit Japanese/English/Chinese/Korean Windows Embedded 8.1 Industry Pro 64bit Japanese Windows 10 IoT Enterprise 2016 LTSB 64bit Japanese/English/Chinese/Korean
Stand	Vertical stand *1, Horizontal installation bracket
Physical dimensions/Weight	115mm(W) x 410mm(D) x 310mm(H) (No protrusions) / About 8kg
Power	250W FlexATX Power (100-240VAC/50/60Hz Automatic input switch)

- *1 Implement and install the options you selected.
- *2 With the Hardware RAID configuration, the transfer speed becomes that of SATA II
- *3 Install the options you selected.
- *4 Only the weight of the main unit. It weighs about 9.2kg in RAID configuration.
- *5 Front LED x 2 are used by option of hardware raid utility.
- *6 You can not be used PCI bus extension chassis made by CONTEC.
- *7 When the number of COM ports is increased, one of these open slots is used.

Ambient specification

Item	Specification
Operating temperature	5 to 40°C
Storage temperature	-20°C to 60°C
Ambient humidity	20 to 80%RH(No condensation)
Floating dust particles	Not to be excessive
Corrosive gases	None
Line-noise resistance	Line noise AC line / ±2kV Signal line / ±1kV (EN61000-4-4Level3, IEC1000-4-4Level3)
	Static electricity resistance Contact discharge / ±4kV(EN61000-4-2Level2, IEC1000-4-2 Level2) Atmospheric discharge / ±8kV(EN61000-4-2Level3, IEC1000-4-2 Level3)
Vibration resistance	Sweep resistance 10 to 57Hz / 0.015m(semi-amplitude), 57 to 150Hz / 1.96m/S2(0.2G) 40 min each XY, and Z directions (JIS C60068-2-6 compliant, IEC60068-5-6 compliant)
	Impact resistance 10G, half-sine shock for 11 ms in XY, and Z directions (JIS C0041 compliant, IEC68-2-27 compliant)
Installation	Class D grounding (previous class 3 grounding), SG-FG/conduction
Certification	VCCI Class A, FCC Class A, CE Marking(EMC Directive Class A, Low Voltage Directive, RoHS)


* Do not use under environmental conditions beyond normal specifications. The system may malfunction.

Option Mirror card specification

Item	Specification
Number of connected drivers	2
RAID level	1
Storage capacity	Max. 2TB
Cache memory size	1MB
Host interface	S-ATA interface Max. data transfer rate : 3Gbps
Drive interface	S-ATA interface Max. data transfer rate : 3Gbps
Range of power-supply voltage	4.75VDC to 5.25VDC
Current consumption	1.1A to 1.5A
Physical dimensions (LxW)	96mm(L) x 98.2mm(W)
Weight	49g


Physical Dimensions

VPC-1600 (Horizontal putting)

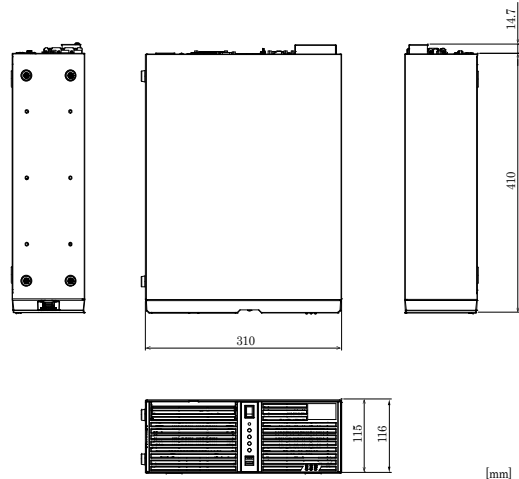


※ 116mm is the height including the protrusion for attaching rubber feet.

VPC-1600 (At installation the wall mount stand)

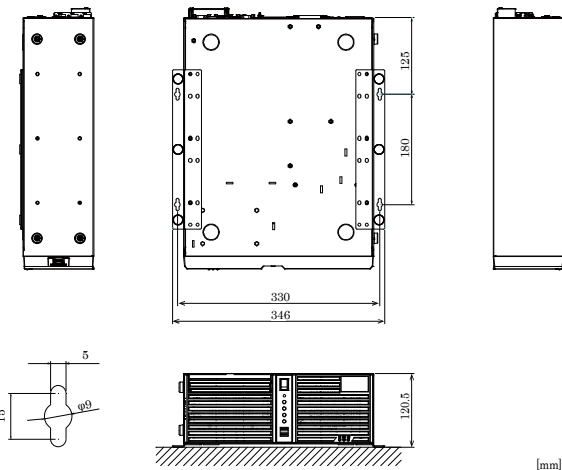

VPC-1600 (At installation the vertical stand)

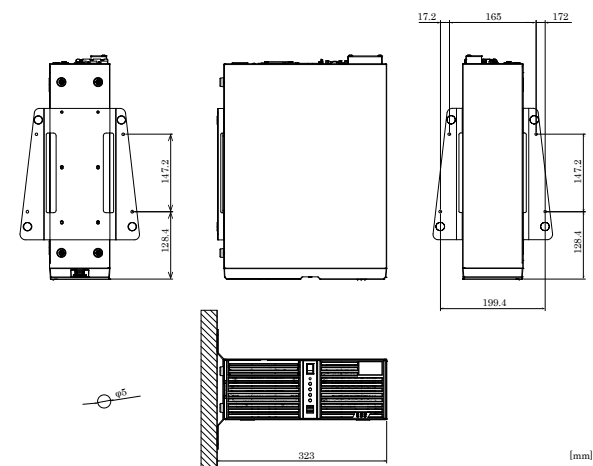

* Visit the Contec website to check the latest OS.

* The information on data sheet is as of November 2018.

Difference from VPC-1500

	VPC-1600	VPC-1500
CPU	Core i5 4570TE 2.7GHz Celeron G1820TE 2.2GHz	Core 2 Duo E84003.0GHz Celeron 440 2.0GHz
Memory	4GB(4GB x 1), 8GB(4GB x2), DDR3 SDRAM(Non-ECC)	2GB(2048MB x 1), 4GB(2048MB x 2), DDR3 SDRAM PC3-10600
USB	USB2.0 compliant front 2port, Rear 2 port, USB3.0 compliant Rear 4port	USB2.0 compliant Front 2port, Rear 4 port
Serial	RS-232C : 3 or 4 port (SERIAL PORT A,B,C,D) 9pin D-SUB Connector (Male)	RS-232C D-SUB 9pin x 4
OS	Windows 7 Professional SP1 32bit Japanese Windows 7 Professional SP1 64bit Japanese Windows 7 Ultimate SP1 32bit Japanese/English/Chinese Windows 7 Ultimate SP1 64bit Japanese/English/Chinese/Korean Windows 7 Embedded 8.1 Industry Pro 64bit Japanese Windows 10 IoT Enterprise2015 LTSB 64bit Japanese/English/Chinese/Korean Windows 10 IoT Enterprise2016 LTSB 64bit Japanese/English/Chinese/Korean	Windows XP Professional SP3 32bit Japanese English /Japanese /Chinese Windows 7 Professional SP1 32bit Japanese English