


Feeder Storage Cabinet 1% internal humidity Patented product

Stores feeders with tape reels with no need to remove the reel from the feeder.

- Applications**
- (1) Feeder storage for IC packages with tape reels
 - (2) Feeder storage for LEDs with tape reels
 - (3) Feeder storage for chips with tape reels

- The feeder rack runs on sliding rails, making it easy to load and remove feeders.
- Capable of accommodating feeders with integrated tapes as well as those with separate tapes.
- Complies with the IPC/JEDEC J-STD-033C control standard for IC packages
- Compatible with all mounter manufacturers, even those that use different feeder loading methods.


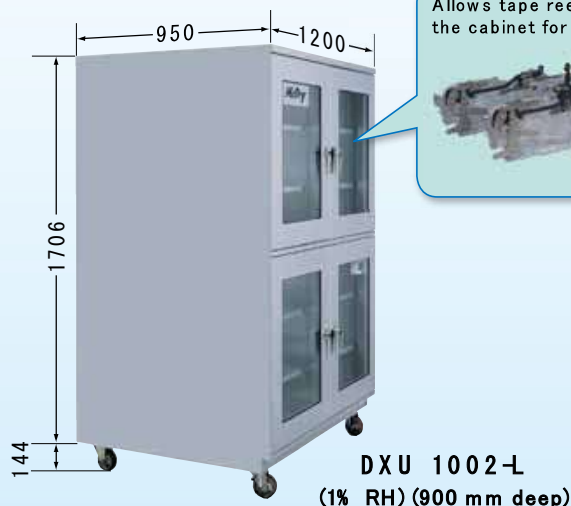


Allows tape reels to be stowed in the cabinet for each tape feeder.

Tape feeder

*Slide rail system optional.

Model	DXU-1002-L
Humidity regulator	Automatic dial regulator
External dimensions	1200W × 1000D × 1850H (mm)
Internal dimensions	1150W × 900D × 1700H (mm)
Capacity	Approx. 1800 \pm
Drying unit	US-5000F × 2
Material	Steel with conductive coating (color: silver)
Doors (magnetic)	4-door with glass panels
Weight	250 kg
Power supply	AC 100 V (50/60 Hz)
Power consumption	56 W/h (MAX 700 W)
Accessories	5 shelves, locks, humidity meter, casters (with stopper), ground terminal

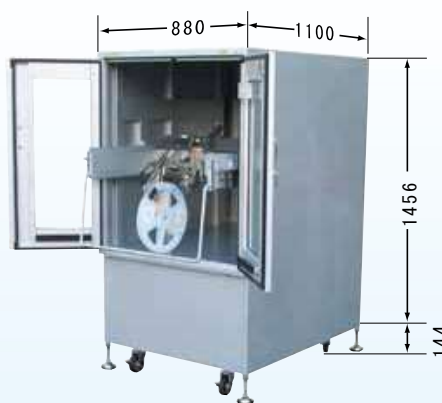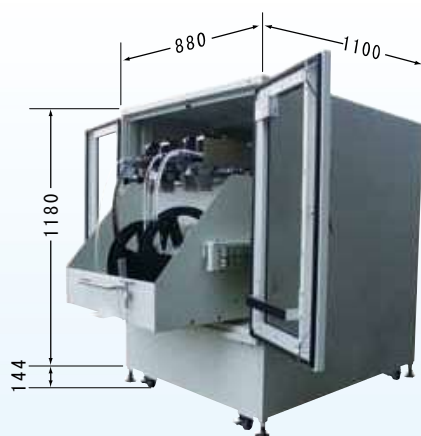

Model	DXU-580SF	DXU-580AF	DXU-400HF
External dimensions	800W × 1200D × 1324H (mm)	880W × 1200D × 1800H (mm)	650W × 600D × 1380H (mm)
Internal dimensions	830W × 1100D × 790H (mm)	830W × 1100D × 955H (mm)	620W × 550D × 1200H (mm)
Capacity	Approx. 900 \pm	Approx. 932 \pm	Approx. 400 \pm
Drying unit	US-5000F × 2		US-5000F
Material	Steel with conductive coating (color: silver)		
Doors (magnetic)	2-door with glass panels		1-door with glass panels
Weight	200 kg	240 kg	110 kg
Power supply	AC 100 V (50/60 Hz)		AC 100 V
Power consumption	56 W/h (MAX 700 W)		28 W/h (MAX 350 W)
Accessories	Locks, humidity meter, casters (with stopper), ground terminal		Locks, humidity meter, casters (with stopper), ground terminal