

**G 2**

**DXU**  
MODEL

**1% internal humidity**  
(rapid dehumidifying model)

For normal surface mounting sites

Mounting sites with a cabinet opening frequency of once every 30-45 minutes


Recommended IC package storage levels: 5, 4 and 3 (JEDEC standard)

Low-energy design: Power consumption approx. 40% lower (compared with existing product)

With 1 drying unit




**DXU 501A**  
600L (3-door)




With 2 drying units




**DXU 1001A**  
1200L (6-door)



**DXU 1002A**  
1200L (4-door)



**DXU-1001A opening-closing data (unloaded)**

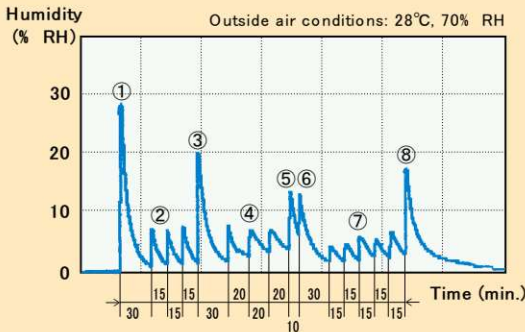

<Location and time of door opening/closing>

- (1) 2 doors C and D.....2 min., both doors
- (2) 1 of A, B, C, D, E and F.....15 sec.
- (3) 2 doors A and B.....1 min., both doors
- (4) 1 of E and F.....15 sec.
- (5) 2 doors E and F.....1 min., both doors
- (6) 2 doors E and F.....30 sec., both doors
- (7) 1 of A, B, E and F.....15 sec.
- (8) 2 doors C and D.....30 sec., both doors

Model	DXU-501A	DXU-1001A	DXU-1002A
Humidity regulator	Automatic dial regulator		
External dimensions	600W × 700D × 1850H (mm)	1200W × 700D × 1850H (mm)	
Internal dimensions	550W × 600D × 1700H (mm)	1150W × 600D × 1700H (mm)	
Capacity	Approx. 600L	Approx. 1200L	
Drying unit	US-5000F	US-5000F × 2	
Material	Steel with conductive coating (color: silver)		
Doors (magnetic)	3-door with glass panels	6-door with glass panels	4-door with glass panels
Weight	110 kg	200 kg	180 kg
Power supply	AC 100 V (50/60 Hz)		
Power consumption	28 W/h (MAX 350 W)	56 W/h (MAX 700 W)	
Accessories	5 shelves, locks, humidity meter, casters (with stopper), ground terminal		

**Features**

- Ultra-powerful rapid dehumidification drying unit
- Digital humidity meter with large display panel
- 1 MΩ ground terminal
- Shelf load capacity: 100 kg
- No central pillar allows full shelf width to be used.

**Custom orders**

N<sub>2</sub> gas socket can also be installed.